


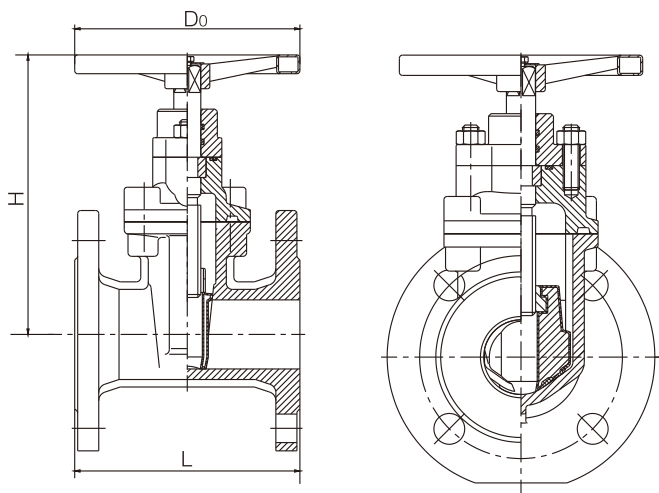

Purpose

This valve is mounted on various pipelines and used as a bi-way closed circuit equipment for tap water, sewage treatment, metallurgy, petroleum, building, chemical, electric power industries etc.

Specification

Design Standard: BS 5163/DIN 3202 F4

Pressure: 1.0MPa, 1.6MPa

Size: DN50~DN800

Medium: Water, air, oil

Temperature: $\leq 80^{\circ}\text{C}$

Main part materials

Description	Material
Body	Ductile Iron
Disc	Ductile Iron+EPDM/NBR
Stem	SS410
Seat	EPDM/NBR
Stem nut	Brass
Split ring	Brass

Main dimensions(mm)

DN		50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800
L	GB	178	190	203	229	254	267	292	330	356	381	406	432	457	508	605	665
	DIN	150	170	180	190	200	210	230	250	270	290	310	330	350	390	430	470
H		233	255	275	330	370	432	495	589	670	1050	1170	1270	1420	1650	1900	2100
D0		180	180	230	230	280	280	330	380	380	380	480	480	600	600	800	800

Note: 1. Other specifications and flange standards are available upon request.
2. Design and specifications are subject to change without prior notice.